

Sterling

Hose, Reel & Supply, LLC.

855-577-HOSE

WWW.STERLINGHOSE.COM

tigerflex

EDITION 0918

Thermoplastic Industrial Hoses

SOLARGUARD

ADVANCED UV PROTECTION

**Liquid Suction and
Material Handling
Hoses with Advanced
UV Protection.**

Lasts Longer – Twice the life!†

Maintains Flexibility


“Safety Yellow” Color



AMPH-SLR™ Series



WST-SLR™ Series

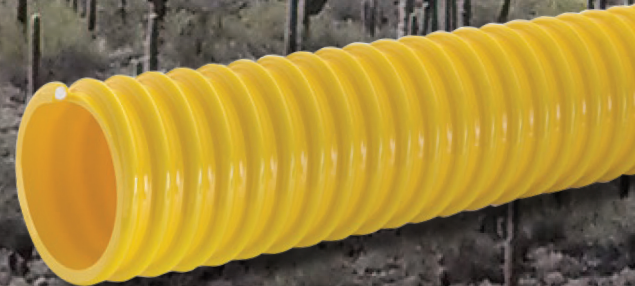

SLR™ Series



SG™ Series



 **KURIYAMA**
OF AMERICA, INC.

 **NAHAD**
THE ASSOCIATION FOR HOSE AND
ACCESSORIES DISTRIBUTION

 **tigerflex**
ISO 9001
QUALITY M.S.

 **MADE IN THE
USA**

† On average, when exposed to high amounts of UV light.



ABRASION
RESISTANT PLUS



OIL
RESISTANT



STATIC
DISSIPATIVE



WATER

Amphibian™ SOLARGUARD

ADVANCED UV PROTECTION

AMPH-SLR™ Series

Heavy Duty Polyurethane Lined
Wet or Dry Material Handling
Hose with High UV Resistance



General Applications:

- Hydroexcavation
- Industrial vacuum equipment
- Material handling – heavy duty abrasive
- Sewer truck boom hose
- Slurry handling

Construction: PVC cover with polyurethane liner, PVC helix and grounding wire

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*

Features and Advantages:

- **Thick Amphibian™ Abrasion Resistant Polyurethane Liner** – Designed for wet or dry applications where severe abrasion is a factor. Provides longer life and lower operating costs versus similar rubber or PVC hoses.
- **Advanced UV Protection!** – The hose material is specially formulated to resist the cracking that can result from exposure to damaging UV light. Our tests show the Solarguard material retained 97% of its original tensile strength after prolonged UV exposure, compared to only 55% tensile strength retention for similar PVC hoses.†
- **Grounding Wire (6" and 8" only)** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly.
- **“Safety Yellow” Color** – For high visibility on site. Reduces risk of tripping or driving over hose.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Phthalate Free**



Nominal Specifications

Series	ID (in)	ID (mm)	OD (in)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Min. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs/ft.)
					68°F	104°F	68°F	104°F			
AMPH-SLR300	3	76.2	3.65	92.6	40	20	Full	28	6	100	1.18
AMPH-SLR600	6	153.4	7.00	177.8	30	15	28	25	18	100/20	4.14
AMPH-SLR800	8	204.8	9.15	232.4	22	15	26	25	22	60/21	6.49

*Actual service temperature range is application dependent.

† This information is based on independent third party test reports which are, to the best of our knowledge, complete and accurate. However, no warranty is expressed or implied, as specific application parameters such as temperature, stress and strain, and chemical exposure vary widely.

⚠ **CAUTION:** Certain sizes of this product are designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.




EASY SLIDE



TRANSPARENT CONSTRUCTION



WATER

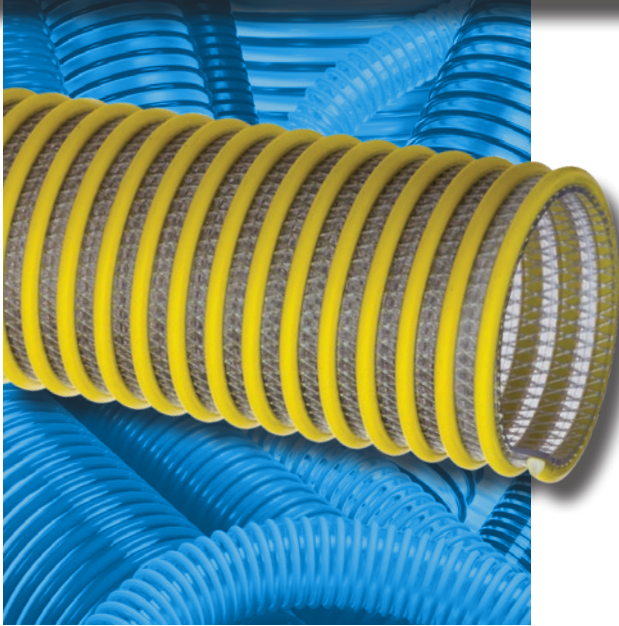

SOLARGUARD

ADVANCED UV PROTECTION

WST-SLR™ Series

Heavy Duty PVC Fabric Reinforced Suction & Discharge Hose with High UV Resistance

General Applications:

- Fish suction
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Suction and discharge
- Water suction – heavy duty

Construction: Double-ply PVC tube, polyester fabric reinforcement and rigid PVC helix.

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*

Features and Advantages:

- **Advanced UV Protection!** – The hose material is specially formulated to resist the cracking that can result from exposure to damaging UV light. Our tests show the Solarguard material retained 97% of its original tensile strength after prolonged UV exposure, compared to only 55% tensile strength retention for similar PVC hoses.†
- **Advanced Transparent UV Protected Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Fabric Reinforcement** – High tensile strength polyester yarn jacket to handle both suction and higher pressure discharge applications.
- **Easy Slide “Safety Yellow” Helix** – Highly visible yellow color helps to easily identify hose. Rigid helix design protects hose tube from cover wear and allows hose to slide easily over rough surfaces.
- **Phthalate Free**

Nominal Specifications

Series	ID (in)	ID (mm)	OD (in)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Min. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs/ft.)
					68°F	104°F	68°F	104°F			
WST-SLR150	1-1/2	38.1	1.95	49.5	110	70	Full	28	2.5	100	0.42
WST-SLR200	2	50.8	2.60	66.0	100	65	Full	28	4	100	0.74
WST-SLR300	3	76.2	3.62	92.0	100	50	Full	28	6	100	1.13
WST-SLR400	4	101.6	4.76	121.0	75	37	Full	28	8	100/20	1.74
WST-SLR600	6	152.4	7.17	182.1	70	35	28	25	13	100/20	3.88
WST-SLR800	8	203.5	9.21	234.0	60	30	26	20	18	20	5.57

* Actual service temperature range is application dependent.

† This information is based on independent third party test reports which are, to the best of our knowledge, complete and accurate. However, no warranty is expressed or implied, as specific application parameters such as temperature, stress and strain, and chemical exposure vary widely.

RoHS(10)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

KTFSGCA0918

SOLARGUARD™
ADVANCED UV PROTECTION
SLR™ Series

Heavy Duty PVC Liquid Suction Hose with High UV Resistance

General Applications:


- Agricultural liquid fertilizers
- Air seeder lines
- Fish suction
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Water suction – heavy duty

Construction: PVC tube with rigid PVC helix.

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*

Features and Advantages:

- **Advanced UV Protection!** – The hose material is specially formulated to resist the cracking that can result from exposure to damaging UV light. Our tests show the Solarguard material retained 97% of its original tensile strength after prolonged UV exposure, compared to only 55% tensile strength retention for similar PVC hoses.†

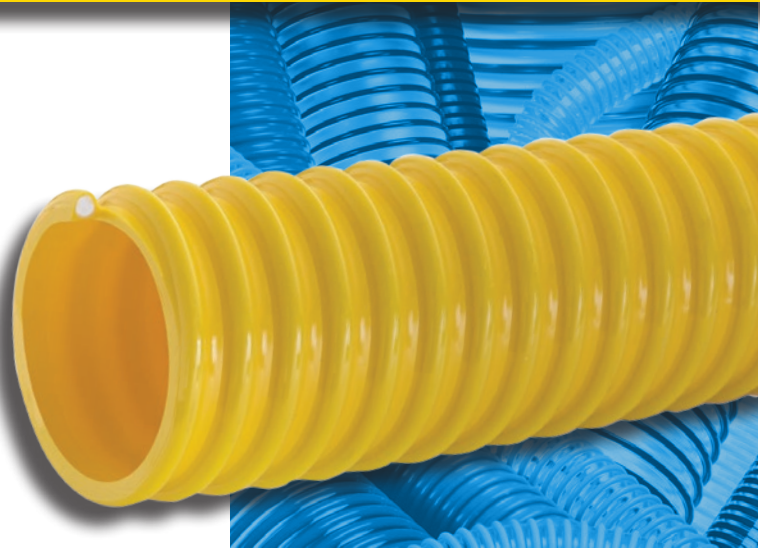

- **“Safety Yellow” Color** – For high visibility on job site. Reduces risk of tripping or driving over hose.
- **Convuluted Outer Cover** – Provides increased hose flexibility.


Nominal Specifications

Series	ID (in)	ID (mm)	OD (in)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Min. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs/ft.)
					68°F	104°F	68°F	104°F			
SLR200	2	50.8	2.40	61.0	50	30	Full	28	3	100	0.52
SLR250	2½	63.5	2.99	75.9	45	25	Full	28	4	100	0.77
SLR300	3	76.2	3.64	92.5	45	25	Full	28	6	100	1.18
SLR400	4	101.6	4.76	121.0	35	18	Full	28	8	100	1.92
SLR600	6	152.4	7.00	177.8	30	15	28	25	14	100/20	3.76
SLR800	8	203.2	9.18	233.2	30	15	28	25	24	40/20	5.99

*Actual service temperature range is application dependent.

† This information is based on independent third party test reports which are, to the best of our knowledge, complete and accurate. However, no warranty is expressed or implied, as specific application parameters such as temperature, stress and strain, and chemical exposure vary widely.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

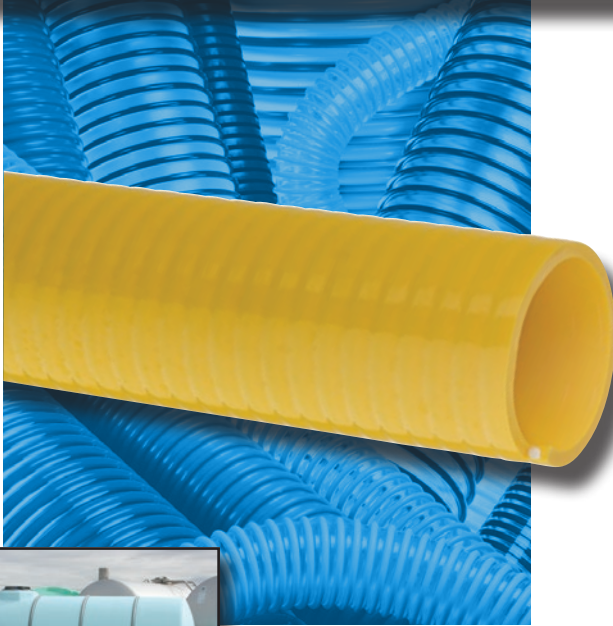

SOLARGUARD™
ADVANCED UV PROTECTION
SG™ Series

Standard Duty PVC Liquid Suction Hose with High UV Resistance

General Applications:

- Agricultural liquid fertilizer
- Air seeder lines
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Water suction – standard duty

Construction: Flexible PVC tube with rigid PVC Helix.

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*

Features and Advantages:

- **Advanced UV Protection!** – The hose material is specially formulated to resist the cracking that can result from exposure to damaging UV light. Our tests show the Solarguard material retained 97% of its original tensile strength after prolonged UV exposure, compared to only 55% tensile strength retention for similar PVC hoses.†
- **“Safety Yellow” Color** – For high visibility on job site. Reduces risk of tripping or driving over hose.
- **Smooth Outer Cover** – Provides smooth surface for banding.
- **Phthalate Free**

Nominal Specifications

Series	ID (in)	ID (mm)	OD (in)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Min. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs./ft.)
					68°F	104°F	68°F	104°F			
SG150	1½	38.4	1.78	45.2	65	45	28	24	5	100	0.38
SG200	2	51.1	2.40	59.0	60	40	28	24	6	100	0.56
SG300	3	76.7	3.41	86.5	55	35	26	22	9	100	1.00
SG400	4	102.4	4.44	112.8	50	35	26	22	15	100	1.70
SG600	6	153.4	6.83	173.4	40	25	26	22	30	100/20	3.36

*Actual service temperature range is application dependent.

† This information is based on independent third party test reports which are, to the best of our knowledge, complete and accurate. However, no warranty is expressed or implied, as specific application parameters such as temperature, stress and strain, and chemical exposure vary widely.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

Engineered Innovation for Longer Hose Life


Hoses used outdoors for prolonged periods of time are subject to damage resulting from exposure to both heat and UV light. Tigerflex™ Solarguard™ hoses are specially constructed to resist this type of damage, resulting in a hose that retains its strength and flexibility longer than standard PVC hoses.



PVC Hose cracking due to UV exposure

Solarguard hoses contain a special blend of UV stabilizers that reflect the damaging UV photons away from the hose. Also, Solarguard hoses are made from a reflective yellow pigment that reduces heat absorption (Solarguard hoses can remain up to 10°F cooler than darker colored hoses), further protecting the hose and extending the service life. Our tests showed only a minimal 3% reduction in hose material strength after prolonged UV exposure, whereas standard PVC hoses showed over 40% strength loss over the same period.

Tensile Strength Retention[†]

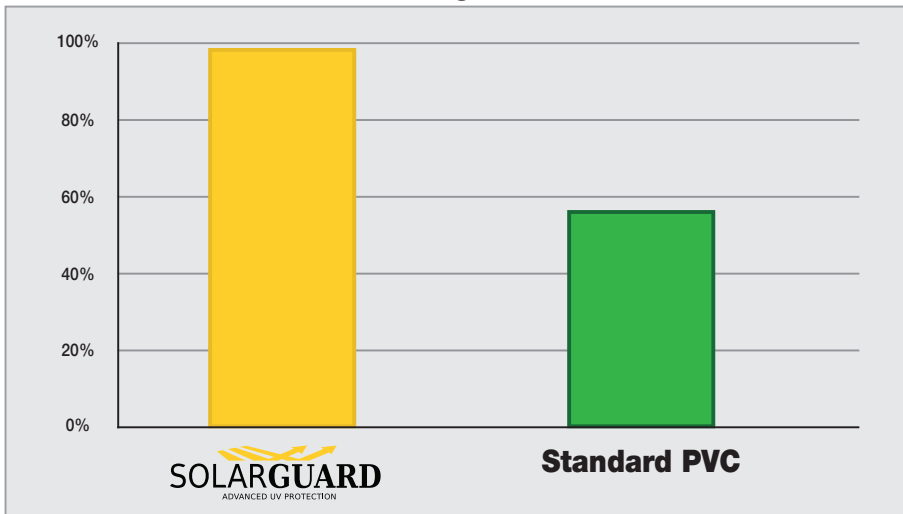

Solarguard hoses maintain their strength and flexibility up to twice as long as standard PVC hoses, resulting in lower overall service cost.

Percentage of tensile strength remaining after 720 hours of accelerated UV light exposure per ASTM G154

[†] This information is based on independent third party test reports which are, to the best of our knowledge, complete and accurate. However, no warranty is expressed or implied, as specific application parameters such as temperature, stress and strain, and chemical exposure vary widely.

Accessories

**NEW
SIZES**

TigerClamps™ Spiral Double Bolt Clamps

- Zinc plated carbon steel.
- Two or more TigerClamps™ are suggested for 3" ID and larger hoses.
- Both hex nuts should be tightened equally to prevent leakage.
- Caution: proper evaluation of holding power for each clamp must be determined for each individual application.

For Counterclockwise Helix Hoses

*Designed to fit most Tigerflex Hoses**

Nominal Specifications			
Part No.	Fits Hose (ID)	Weight ea. (lbs.)	Standard Carton Qty.
SDBC-1.5	1-1/2"	0.18	100
SDBC-2	2"	0.36	100
SDBC-2.25	2-1/4"	0.40	100
SDBC-2.5	2-1/2"	0.48	100
SDBC-3	3"	0.66	70
SDBC-3.5	3-1/2"	0.70	70
SDBC-4	4"	1.02	40
SDBC-5	5"	1.76	30
SDBC-6	6"	2.00	20
SDBC-8	8"	2.76	10
SDBC-10	10"	3.46	10
SDBC-12	12"	4.14	10

TigerClamp™ Stainless Steel Spiral Double Bolt Clamp

(For Counterclockwise Spiral)

Designed to Fit Tigerflex™ PVC Suction Hoses

Nominal Specifications			
Part No.	Fits Hose (ID)	Weight ea. (lbs.)	Standard Carton Qty.
SDBC-SS-1.5	1 1/2"	0.40	100
SDBC-SS-2	2"	0.42	100
SDBC-SS-2.5	2.5"	0.53	100
SDBC-SS-3	3"	0.88	50
SDBC-SS-3.5	3.5"	0.77	70
SDBC-SS-4	4"	1.01	40
SDBC-SS-6	6"	2.09	20
SDBC-SS-8	8"	2.97	10

For Clockwise Helix Hoses

*Designed to fit Tigerflex TR1 and THT-series hoses**

Nominal Specifications			
Part No.	Fits Hose (ID)	Weight ea. (lbs.)	Standard Carton Qty.
SDBCR-1.5	1.5"	0.18	100
SDBCR-2	2"	0.36	100
SDBCR-3	3"	0.66	70
SDBCR-4	4"	1.02	40
SDBCR-5	5"	1.76	30
SDBCR-6	6"	2.00	20
SDBCR-8	8"	2.76	10
SDBCR-10	10"	3.46	10
SDBCR-12	12"	4.14	10

*Refer to Tigerflex Catalog Accessories compatibility chart on pages 59-61.



Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

Cautionary Statement

All Products sold and distributed by Kuriyama of America, Inc. are in the nature of commodities and they are sold by published specifications and not for particular purposes, uses or applications. Purchaser shall first determine their suitability for the intended purposes, uses or applications and shall either conduct its own engineering studies or tests, or retain qualified engineers, consultants or testing laboratories and consult with them before determining the proper use, suitability or propriety of the merchandise or Products for the intended purposes, uses or applications.

Kuriyama of America, Inc. ("Seller") does not recommend the Products for any particular purpose, use or application, and the Purchaser or user thereof shall assume full responsibility for the suitability, propriety, use and application of the Products. Purchaser shall follow all instructions contained in Seller's catalogs, brochures, technical bulletins and other documents regarding the Products. The Products, including but not limited to, hose, tubing or couplings, may fail due to the use or conveyance of substances at elevated or lowered temperatures or at excessive pressure, the conveyance of abrasive, injurious, flammable, explosive or damaging substances.

Hose or tubing used in bent configurations will be subjected to increased abrasion. Hose clamps or couplings may loosen after initial installation and all sections of hose and tubing including connections, couplings, clamps, conductivity and bonding should be inspected frequently, regularly and consistently, and should be replaced, adjusted or re-tightened for the avoidance of leakage, for the prevention of injuries or damages, and for general safety purposes. Except as indicated in its Limited Warranty, Seller shall not be liable or responsible for direct or indirect injuries or damages caused by or attributed to the failure or malfunction of any Products sold or distributed by it.

Purchasers or users of the Products should frequently and consistently undertake inspections and protective measures with respect to the use and application of Products, which should include the examination of tube and cover, conditions of the hose or tubing, and the identification, repair or replacement of sections showing cracking, blistering, separations, internal and external abrasions, leaking or slipped couplings or connections and make proper proof tests.

Limited Warranty

The Products sold or distributed by Seller are warranted to its customers to be free from defects in material and workmanship at the time of shipment by us, subject to the following provisions. ALL WARRANTY CLAIMS SHALL BE MADE WITHIN SIX (6) MONTHS AFTER SELLER SHIPPED THE PRODUCTS. SELLER'S LIABILITY HEREUNDER IS LIMITED AT SELLER'S EXCLUSIVE DISCRETION, TO 1) THE PURCHASE PRICE OF ANY PRODUCTS PROVING DEFECTIVE; 2) REPAIR OF ANY DEFECTIVE PRODUCT OR PART THEREOF; OR 3) REPLACEMENT OF ANY DEFECTIVE PRODUCT OR PART UPON ITS AUTHORIZED RETURN TO SELLER.

THIS WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE CREATED UNDER APPLICABLE LAW INCLUDING, BUT NOT LIMITED TO, THE WARRANTY OF MERCHANTABILITY AND THE WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL SELLER OR THE MANUFACTURER OF THE PRODUCT BE LIABLE FOR SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING LOSS OF PROFITS, WHETHER OR NOT CAUSED BY OR RESULTING FROM THE NEGLIGENCE OF SELLER AND/OR THE MANUFACTURER OF THE PRODUCT, UNLESS SPECIFICALLY PROVIDED HEREIN. IN ADDITION, THIS WARRANTY SHALL NOT APPLY TO ANY PRODUCTS OR PORTIONS THEREOF WHICH HAVE BEEN SUBJECT TO ABUSE, MISUSE, IMPROPER INSTALLATION, MAINTENANCE, OR OPERATION, ELECTRICAL FAILURE OR ABNORMAL CONDITIONS, AND TO PRODUCTS WHICH HAVE BEEN TAMPERED WITH, ALTERED, MODIFIED, REPAIRED, REWORKED BY ANYONE NOT APPROVED BY SELLER, OR USED IN ANY MANNER INCONSISTENT WITH THE PROVISIONS OF THE "CAUTIONARY STATEMENT" ABOVE OR ANY INSTRUCTIONS OR SPECIFICATIONS PROVIDED WITH OR FOR THE PRODUCT. 05/03/21 REV

Distributed By

Sterling

Hose, Reel & Supply, LLC.

855-577-HOSE

WWW.STERLINGHOSE.COM



KURIYAMA

OF AMERICA, INC.

HEADQUARTERS, SALES OFFICE AND WAREHOUSE

360 E. State Parkway, Schaumburg, IL 60173-5335
Phone: (847) 755-0360 • Toll-free Fax: (800) 800-0320

International Fax: (847) 885-0996



kuriyama.com



sales@kuriyama.com



The trademarks contained in this publication are trademarks of Kuriyama of America, Inc.

The "Tigerflex" design trademarks contained in this publication are trademarks of Tigers Polymer Corporation.

©2023 Kuriyama of America, Inc. All rights reserved.

CONTACT OUR SALES/WAREHOUSE LOCATIONS BELOW WHICH SERVE YOUR AREA

SOUTHWEST WAREHOUSE

KURIYAMA OF AMERICA, INC.

– HOUSTON

200 Portwall Street, Suite 100
HOUSTON, TX 77029

Phone: (713) 674-8212

Toll Free Phone: (800) 501-6808

FAX: (713) 674-5214

Toll Free FAX: (800) 800-5214

E-Mail: sales@kuriyama.com

WESTERN WAREHOUSE

KURIYAMA OF AMERICA, INC.

– SANTA FE SPRINGS

10749 SHOEMAKER AVENUE

SANTA FE SPRINGS, CA 90670-4039

Phone: (562) 941-4507

FAX: (562) 941-8940

Toll-Free FAX: (800) 326-8940

E-Mail: sales@kuriyama.com

SOUTHEAST WAREHOUSE

FORTNEY SALES CO., INC.

4221 Cantrell Road NW

Acworth, GA 30101

Phone: (770) 427-6528

FAX: (770) 423-9249

Toll Free FAX: (800) 423-9249

Web Site: www.fortneysales.com

E-Mail: sales@fortneysales.com

EASTERN WAREHOUSE

EASTERN RUBBER & PLASTICS CO., INC.

100 GOLDMAN DR.

PLUMSTED INDUSTRIAL PARK

CREAM RIDGE, NJ 08514

Phone: (609) 758-0100

FAX: (609) 758-0102

Toll Free FAX: (800) 445-7138

Web Site: www.easternrubber.com

E-Mail: sales@easternrubber.com

IN MEXICO:

KURIYAMA DE MÉXICO S DE RL DE CV

AV JOSE PALOMO MARTINEZ NO 520-20 BODEGA 5

PARQUE INDUSTRIAL OMOLAP

APODACA, N.L. CP:66633, MÉXICO

Telefonos: (81) 1086-1870 0 71

Internet: www.kuriyama.com.mx

www.kuriyama.com

Correo Electronico: ventas@kuriyama.com